


KTL SPORT PRO II SYSTEM

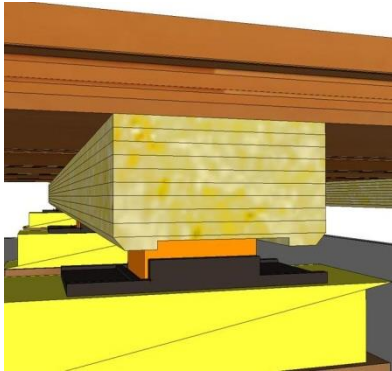

KTL SPORT PRO II is an area-elastic sports floor, based on 22mm solid hardwood 2-strip parquet boards, nailed to a resilient 1-layer batten system, installed and levelled over concrete subfloor. Total construction height excluding packing is 64mm.

The sports performance of this floor features high shock absorbency and resilience combined with ultimate stability under foot, designed for multi-purpose use with focus on ball games, badminton and gymnastics. Tested and conforms fully to EN 14904, Class A4. The elastic shock pads features build-in deformation control, securing maximum loading capacity - also towards heavy equipment, combined with long-term protection of the floor resilience.

For construction heights > 120mm, the floor can be installed on raised, levelled non-elastic under battens as a 2-layer system, with identical sports functional characteristics.

COMPOSITION OF FLOOR SYSTEM

1. Floor boards:

22 x 130 x 2180mm solid 2-strip parquet boards, secretly nailed onto battens according to a specified 10-board measurement and a board pattern.

Wood species:

Ash, Beech, Hevea, Maple, Oak.

Grades: Premium/Select

Surface: Matt lacquer (standard factory lacquer) and semi-gloss

2. Nails:

2.2 x 45mm machine nails

3. Sports Batten System:

KTL SPORT PRO II,

(Mrk.: KTL/SBS/22/64/500)

Batten in Laminated Veneer

Lumber (LVL) of pine in 30 x 58 x 3500mm, with resilient shock pads in sports shoes, pre-fixed into a grooved backside at c/c 500mm.

Batten distance, max.:

c/c 363.3mm (Ash/Beech/Maple)

c/c 311.4mm (Hevea/Oak)

4. Packing:

Plastic wedges, bitumen paper, plywood or other stable material.


The packing is fixed on the sports shoes using 2 pcs. of stables.

5. Moisture barrier:

Min. 0.20 mm PE-folio

6. Subfloor:

Concrete

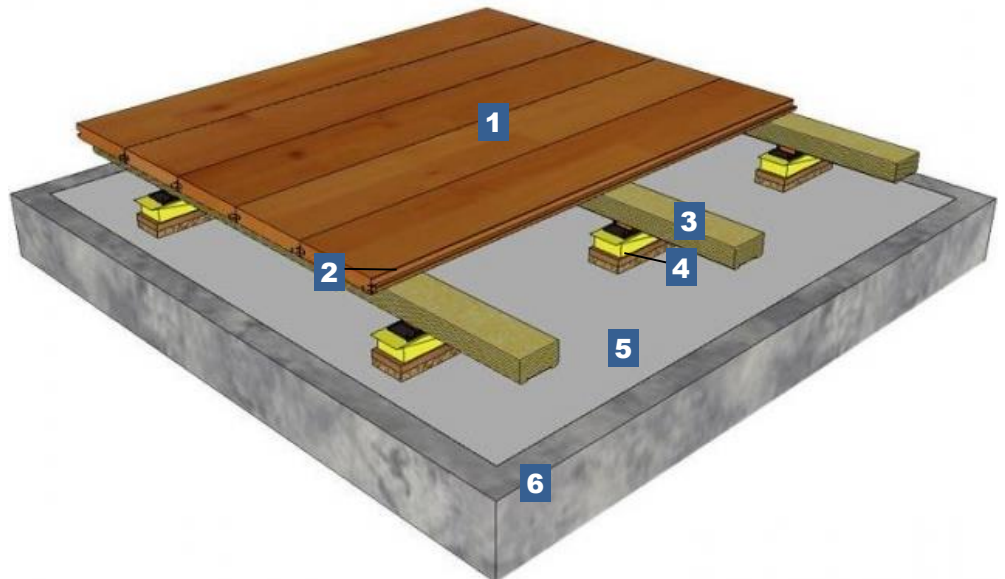

Material consumption at 100 m2:

	Batten distance, c/c 363mm	Batten distance, c/c 311mm
■ Floor boards:	100 m2 + 2% waste	100 m2 + 2% waste
■ Nails, 2.2x45mm:	Approach. 1850 pcs.	Approach. 2250 pcs.
■ Sports Battens:	290 rm.	330 rm.
■ Packings:	550 pcs.	650 pcs.
■ Stables:	1100 pcs.	1300 pcs.
■ Loose tongue:	1 x length of floor (m)	1 x length of floor (m)
■ PVAC glue:	0.1 litre	0.1 litre
■ Moisture barrier:	110 m2 incl. overlap	110 m2 incl. overlap
■ Line marking:	Line marking can be applied directly onto the factory finish, using a special 2-pack water-based paint system, ready for use after curing.	
■ Maintenance lacquering:	When maintenance lacquering is required, the floor is buffed, before the maintenance coat of lacquer is applied onto the surface. Verify adhesion of the maintenance lacquer before starting the job.	

MANUFACTURER

KTL INTERNATIONAL SDN BHD
Lot 121 & 123, Jalan Enam,
Komplek Perabot Olak Lempit,
4270 Banting, Selangor, Malaysia

SALES & SUPPORT

KTL Domestic +60 3 3149 3128
KTL Export +60 1 22676366
KTL Europe +45 4432 8450
www@ktl.com • sales@ktlfloor.com

KTL SPORTS FLOORING

SPECIFICATION
PRO II SYSTEM
E 4.0
16-12-2016 (UK)

Performance:
Sports functional features of KTL SPORT PRO II SYSTEM

Test method	EN Standards	EN demands acc to Class A4	Batten distances	
			311mm	363mm
Shock absorption [%]	EN 14904:2006	55 – 75	63	65
Standard deviation [mm]	EN 14904:2006	2.3 – 5.0	2.4	2.8
Ball rebound [%]	EN 12335:2004	≥ 90	95	94
Rolling load [N]	EN 1569	Min. 1500	> 1500	
Friction	EN 13036-4	80 – 110	80 – 90	
Other Tests				
Friction	DIN 18032	0.4 – 0.6	0.41	
Loading Capacity	EN 1533	4.0 kN	5.5kN	5kN

*) Tested by Technological Institute, DK.

SPECIFICATION OF KTL SPORT PRO II SYSTEM
Floor boards:

22 x 130 x 2180mm solid 2-strip parquet boards of [Ash/Beech/Hevea/Maple/Oak] in the grade [Premium/Select], composed from two rows of finger joined staves, assembled by a longitudinal glued centre joint. The boards are profiled with tongue and groove on all 4 sides.

Boards are secretly nailed onto the sub-construction, using 2.2 x 45mm machine nails.

**Sub-construction:
(Total height 64-120mm)**

Batten in Laminated Veneer Lumber (LVL) of pine in 30 x 58 x 3500mm with resilient shock pads in sports shoes, grooved into the backside, c/c 500mm, installed on [concrete slab] at a batten distance, c/c of [363mm/311mm for Ash/Beech/Maple or 311mm for Hevea/Oak], levelled and packed by means of [wedged, bitumen paper and/or plywood] to required construction height of [x mm]. (Recommended: H = 64-120mm)

Total construction height incl. flooring, excluding packing, is 64mm.

References:

- KTL SPORT brochure.
- KTL product datasheet for parquet floor boards.
- KTL laying instruction on PRO II system.
- KTL cleaning and maintenance for sports floors.
- www.ktlfloor.com or contact Technical Service at KTL for consultancy.